


Fitted continuous module pavement lights (CC series)


item	Roof-domes				R-D height	thickness plates/sheets		opening devices	indicative weight	
	Clean light "A" and "L" in cm	Kerbstone made of reinforced concrete or other material "S" in cm	Max roof dome holder "B" in cm	Max roof dome dimensions "C" in cm	Sail shape H 3 in cm	PMMA P.E/P.I. thickness in mm	PC P.E/P.I. thickness in mm	manual (*) electric (*)	PMMA e/o PC P.S. in Kg al ml.	PMMA e/o PC P.D. in Kg al ml.
CC01	40xL	8	58xL	62xL	12	3/3	3/3	● (*)	2,9	5,9
CC02	50xL	8	68xL	72xL	14	3/3	3/3	● (*)	3,4	6,8
CC03	60xL	8	78xL	82xL	16	3/3	3/3	● (*)	3,8	7,7
CC04	70xL	8	88xL	92xL	18	3/3	3/3	● (*)	4,3	8,6
CC05	80xL	8	98xL	102xL	20	3/3	3/3	● (*)	4,7	9,5
CC06	90xL	8	108xL	112xL	22	3/3	3/3	● (*)	5,2	10,4
CC07	100xL	8	118xL	122xL	24	4/3	4/3	● (*)	7,5	13,1
CC08	110xL	8	128xL	132xL	26	4/3	4/3	● (*)	8,1	14,2
CC09	120xL	8	138xL	142xL	28	4/3	4/3	● (*)	8,7	15,2
CC10	125xL	8	143xL	147xL	29	4/3	4/3	● (*)	9,0	15,8
CC11	130xL	8	148xL	152xL	30	4/3	4/3	● (*)	9,3	16,3
CC12	140xL	8	158xL	162xL	32	4/3	4/3	● (*)	9,9	17,3
CC13	150xL	8	168xL	172xL	34	4/3	4/3	● (*)	10,5	18,4
CC14	160xL	8	178xL	182xL	36	4/3	4/3	● (*)	11,1	19,4
CC15	170xL	8	188xL	192xL	38	4/3	4/3	● (*)	11,7	20,5
CC16	180xL	8	198xL	202xL	40	4/3	4/3	● (*)	12,3	21,5
CC17	200xL	8	218xL	222xL	42	4/3	4/3	● (*)	13,5	23,6

(*) the electric "whole-hole" opening device can be max 15 ml long.

(*) the manual opening device can be max 4 ml long.

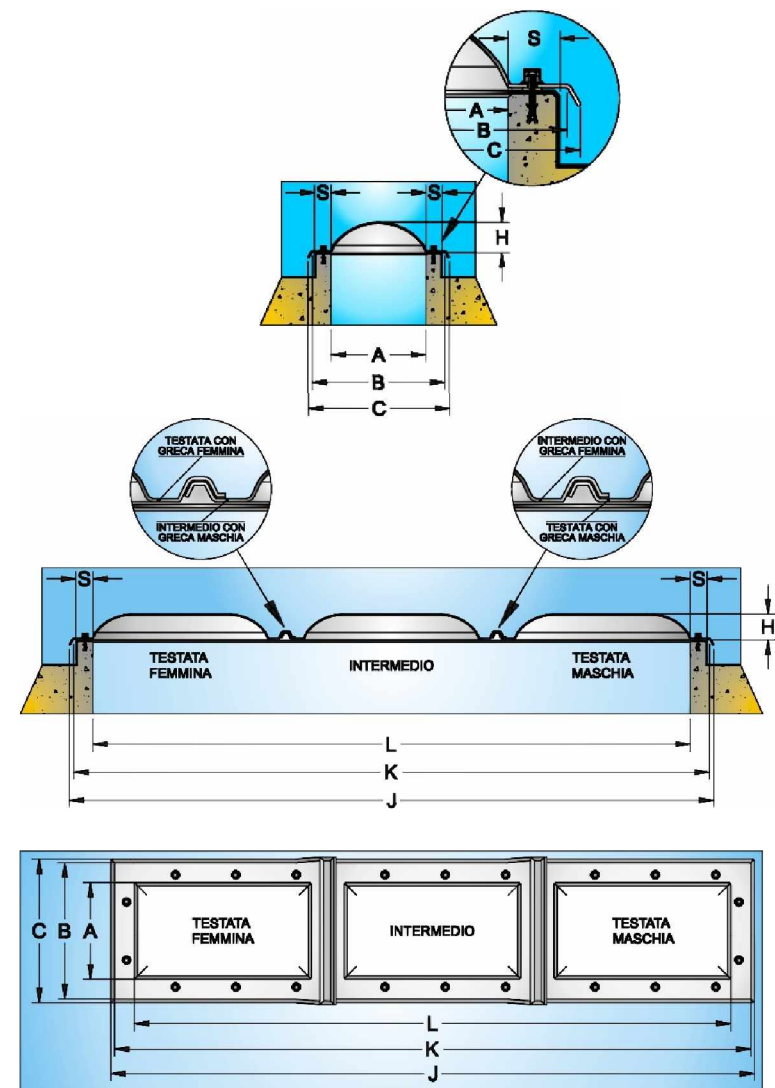

PARTICULARS

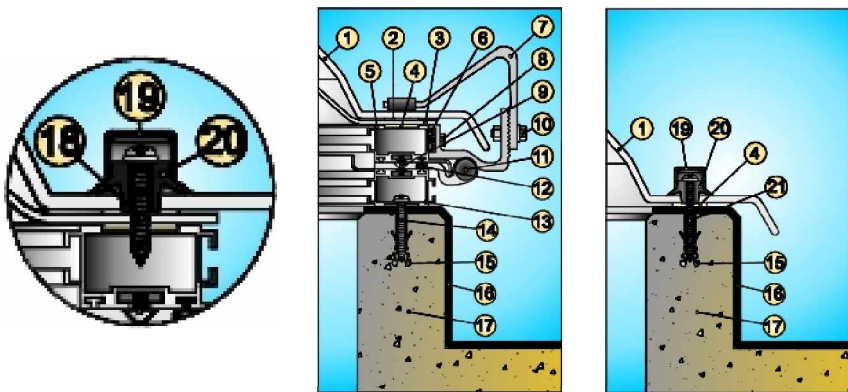

Square/rectangular roof dome Technical information

Features

Feature index with opening

- 1 external wall pavement light
- 2 acrylic biadhesive
- 3 internal wall pavement light
- 4 monoadhesive trimming
- 5 mobile aluminium counter frame
- 6 galvanized steel threaded cores
- 7 upper and lower clamp
- 8 galvanized steel hinge
- 9 galvanized steel flared head screw
- 10 galvanized steel hinge and nut
- 11 hinge
- 12 trimming
- 13 steady aluminium frame
- 14 galvanized steel screw
- 15 nylon panel
- 16 watertight coat
- 17 reinforced concrete kerbstone

index of the cap option on a feature with opening

- 18 galvanized steel screw
- 19 nylon cap
- 20 under suction nylon cap

fixed feature index

- 1 external wall pavement light
- 4 monoadhesive trimming
- 15 nylon panel
- 16 watertight coat
- 17 reinforced concrete kerbstone
- 19 nylon cap
- 20 under suction nylon cap
- 21 galvanized steel screw